


TT1 1 TRISHIELD CABLE

High quality new coax cables line - TT11 Trishield prepared for every possible application. TT11 cables are based on RG11 standard. All cables have 3 screening layers which perfectly protect RF signal from any interferences. All cables are A CLASS providing >100dB screening effectiveness.

In order to meet our partners and clients expectations we've prepared cables with fully copper cores. Screen is made from aluminium - foil, braid, foil.

TT11 cables are available with Fca and Dca class fire reaction certification.

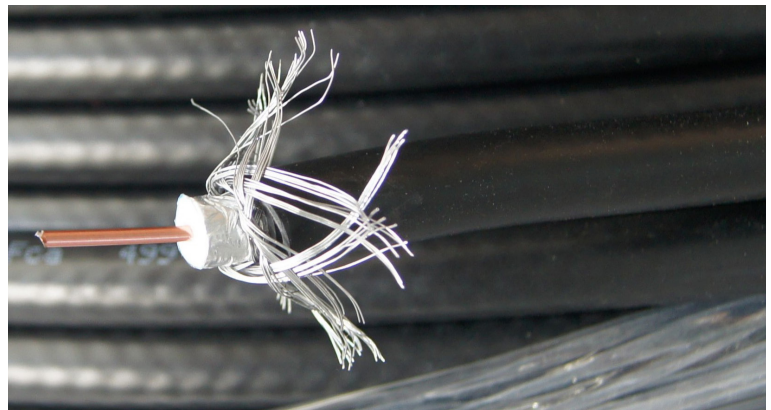

Main features:

- 1,63mm copper core
- 80% braid coverage
- Physically foamed dielectric
- Very strict production rigors
- CPR compliant Dca, Fca (depending on type)
- Available on 500m rolls
- Class A+ screening
- Trishield

Suggested other products:

TT 113 Cu Trishield Eca- RG6 1,13 Cu coax cable

TTE UTP5e Eca - LAN cable

TTE UTP6 Dca - LAN cable

WKW, WPW, WPG, WKG - quick IEC connectors

TECHNICAL PARAMETERS

| Type | TT6 102 Trishield coax cable | | Attenuation | |
|---------------------|------------------------------|--|-------------|---------|
| | MHz | | MHz | dB/100m |
| Frequency range | | 5-3000 | | |
| Core material | / | Cu | 55 | 2,2 |
| Braid type | / | Trishield, 78% coverage | 187 | 5,6 |
| Cable type | / | RG11 | 450 | 9,2 |
| Screening | / | Glued Al foil for dielectric/ braid Al 78% / Al foil glued to the jacket | 750 | 12,9 |
| Coating | / | PVC (Fca) black / PVC LSZH (Dca) black | 2150 | 21 |
| Impedance | Ohm | 75 | 3000 | 23 |
| Jacket diameter | mm | 10 | | |
| Dielectric diameter | mm | 7,11 | | |
| Core diameter | mm | 1,63 | | |
| Spool length | m | 500m | | |
| Indeks/EAN | / | WKA-0101-021-02 / 5903953010315 TT11 Cu Trishield Dca 500m WKA-0101-021-01 / 5903953010308 TT11 Cu Trishield Fca 500m | | |